SENECA POWER GENERATION

Distributed by Genrep

# 150KW

Model: 150GGS2
Standby - Natural Gas/Propane
Stationary Units
18-Month Limited Warranty



## Made in Canada

All Seneca Power Products are engineered and assembled in Southern Ontario, distributed in Canada by Genrep.

## Low Emissions

PSI 8.8 L natural gas engines are certified in Tier 2, reliable, high performance, fuel efficient and compact.

## Nation-wide Service

Seneca products are covered with warranty, parts and service, by Genrep's nationwide network of trained professionals.

## Built to Last


PSI brand gas engine, Stamford alternator, and Deep Sea controller. Factory load tested and functionally robust with directly coupled brushless alternator.

## Applications

Easy to install and use across industries including government offices, healthcare, construction, hospitality, manufacturing, agriculture and more.

## Weight & Dimensions

| | |
|---|---|
| Approx. Weight | 6000 Lbs |
| Length | 156" |
| Width | 56" |
| Height | 83" |

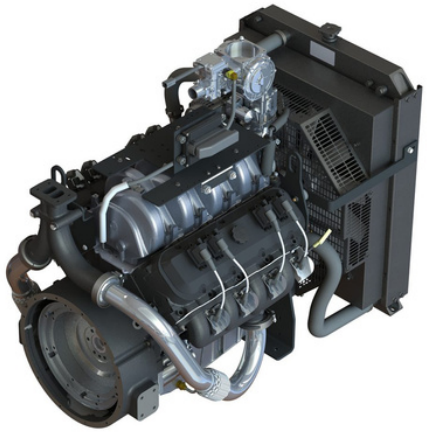





Pictures and dimensions shown are for illustration purposes only. The actual product may vary based on power node and part visibility.

## Engine Specifications

| | |
|---|---|
| Engine Brand / Model | PSI 8.8 LT CAC |
| Cylinders, number | 8 |
| Displacement (L) | 8.8 L |
| Aspiration | Forced Induction |
| Bore & Stroke | 115.06 x 114 |
| Compression Ratio | 10.1:1 |
| Combustion System | Premixed and Spark Ignited |
| Rated RPM | 1800 |
| Max Power at Rated RPM | 194.98 KW |
| Governor | Electronic |
| Emissions | EPA Tier 2 |

## Genset Specifications

| | |
|---|---|
| Power | 150 KW |
| Power Rating | Standby |
| Speed RPM (Hz) | 1800(60) |
| Enclosure Type | Open/Closed |
| Vibration Mounts | Rubber Mounts |
| Coupling | Direct/Motor Shaft |
| Spark Plugs | STANDARD |
| Brushless Design with AVR | STANDARD |
| Key Start | OPTIONAL |
| Exhaust Flex and Piping | OPTIONAL |
| Oil change Pump | OPTIONAL |
| Sound Enclosure | OPTIONAL |
| Custom Designing for Special Applications | OPTIONAL |
| Block Heater | OPTIONAL |
| Specific Fuel Consumption 1800RPM @100% (NG) | 39.37 Kg/Hr |
| Specific Fuel Consumption 1800RPM @100% (LP) | 37.04 Kg/Hr |

## Electrical Specifications

| | | Standby - NG | | | Standby - LP | | |
|---|---|---|---|---|---|---|---|
| Volts | Power Factor | KW | KVA | AMPS | KW | KVA | AMPS |
| 120/240 1-PH | 1 | 150 | 150 | 625 | 125 | 125 | 521 |
| 120/208 3-PH | 0.8 | 150 | 187.5 | 520 | 125 | 156.25 | 434 |
| 120/240 3-PH | 0.8 | 150 | 187.5 | 451 | 125 | 156.25 | 376 |
| 277/480 3-PH | 0.8 | 150 | 187.5 | 225 | 125 | 156.25 | 188 |
| 346/600 3-PH | 0.8 | 150 | 187.5 | 180 | 125 | 156.25 | 150 |

## Controller Specifications

| | |
|---|---|
| Brand | DSE |
| Full Engine Monitoring | YES |
| Full AC/DC Monitoring | YES |
| USB Connectable | YES |
| Electronic Speed Control | YES |
| Remote Start Stop Capability | YES |
| Safety Shut Downs For Monitored Parameters | YES |
| Remote Display Panel | OPTIONAL |
| DSE Web Net | OPTIONAL |
| External Emergency Stop | OPTIONAL |
| Additional Inputs/Outputs | OPTIONAL |
| Maintenance Interval Timer | DISABLED |
| Load Shedding/Dummy | DISABLED |

**Please contact your local dealer for parts, warranty, maintenance, and service**



Pictures and dimensions shown are for illustration purposes only. The actual product may vary based on power node and part visibility.