SENECA POWER GENERATION

Distributed by Genrep

# 200KW

Model: 200DHS4
Prime - Diesel
Stationary & Mobile Units
18-Month Limited Warranty



## Made in Canada

All Seneca Power Products are engineered and assembled in Southern Ontario, distributed in Canada by Genrep.

## Low Emissions

Hyundai DX08 7.5 L diesel engines are certified in Tier 4 and are reliable, high performance, fuel efficient and compact.

## Nation-wide Service

Seneca products are covered with warranty, parts and service, by Genrep's nationwide network of trained professionals.

## Built to Last

Hyundai brand diesel engine, Stamford alternator, and Deep Sea controller. Factory load tested and functionally robust with directly coupled brushless alternator.


## Applications

Easy to install and use across industries including government offices, healthcare, construction, hospitality, manufacturing, agriculture and more.

## Weight & Dimensions

| | |
|---|---|
| Approx Weight | 9500LBS |
| Length | 201" |
| Width | 65" |
| Height | 104" |

Powered by HYUNDAI

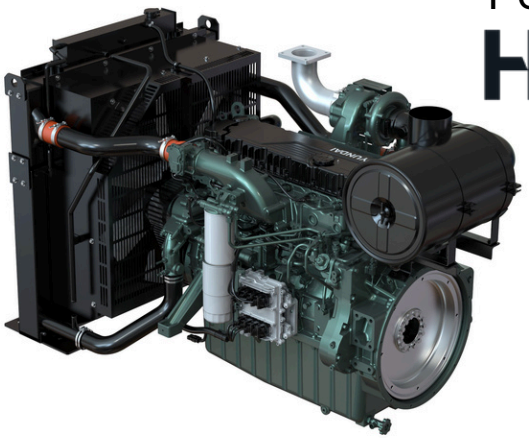





Pictures and dimensions shown are for illustration purposes only. The actual product may vary based on power node and part visibility.

## Engine Specifications

| | |
|---|---|
| Engine Brand / Model | Hyundai DP086CBP |
| Cylinders, number | 6 |
| Displacement (L) | 7.5 L |
| Aspiration | Turbo Charged & Intercooled |
| Bore & Stroke | 110 X 132 |
| Compression Ratio | 16.6 : 1 |
| Combustion System | Compression Ignition |
| Rated RPM | 1800 |
| Max Power at Rated RPM | 260 KWm |
| Governor | ECU Controlled |
| Emissions | EPA Tier 4 / Stage 5 |
| Starter Motor | 24 V X 6 KW |
| Battery Charging Alternator | 27.5 V X 45 A |

## Genset Specifications

| | |
|---|---|
| Power | 200 KWe |
| Power Rating | Prime |
| Speed RPM (Hz) | 1800(60) |
| Enclosure Type | Weather |
| Vibration Mounts | Rubber Mounts |
| Coupling | Direct |
| Electric Fuel Pump | STANDARD |
| Glow Plugs | STANDARD |
| Brushless Design with AVR | STANDARD |
| Key Start | OPTIONAL |
| Exhaust Flex and Piping | OPTIONAL |
| Oil change Pump | OPTIONAL |
| Sound Enclosure | OPTIONAL |
| Custom Designing for Special Applications | OPTIONAL |
| Block Heater | STANDARD |
| Specific Fuel Consumption 1800RPM @ 50% | 31.9 L/Hr |
| Specific Fuel Consumption 1800RPM @100% | 62.7 L/Hr |

## Electrical Specifications

| | | Standby | | | Prime | | |
|---|---|---|---|---|---|---|---|
| Volts | Power Factor | KW | KVA | AMPS | KW | KVA | AMPS |
| 120/240 1-PH | 1 | 225 | 225 | 938 | 200 | 200 | 833 |
| 120/208 3-PH | 0.8 | 225 | 281.25 | 781 | 200 | 250 | 694 |
| 120/240 3-PH | 0.8 | 225 | 281.25 | 677 | 200 | 250 | 601 |
| 277/480 3-PH | 0.8 | 225 | 281.25 | 338 | 200 | 250 | 301 |
| 346/600 3-PH | 0.8 | 225 | 281.25 | 271 | 200 | 250 | 241 |

## Controller Specifications

| | |
|---|---|
| Brand | DSE |
| Full Engine Monitoring | YES |
| Full AC/DC Monitoring | YES |
| USB Connectable | YES |
| Electronic Speed Control | YES |
| Remote Start Stop Capability | YES |
| Safety Shut Downs For Monitored Parameters | YES |
| Remote Display Panel | OPTIONAL |
| DSE Web Net | OPTIONAL |
| External Emergency Stop | OPTIONAL |
| Additional Inputs/Outputs | OPTIONAL |
| Maintenance Interval Timer | DISABLED |
| Load Shedding/Dummy | DISABLED |

**Please contact your local dealer for parts, warranty, maintenance, and service**



Pictures and dimensions shown are for illustration purposes only. The actual product may vary based on power node and part visibility.